



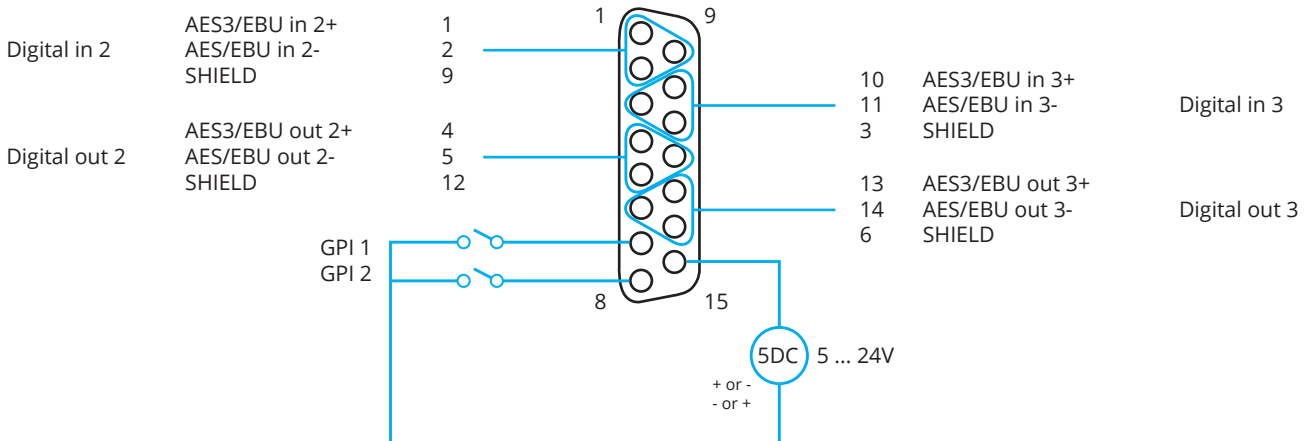

## Intellimix Base Unit Pin Assignment

D-Sub 15 digital connector  
Multi I/O 2

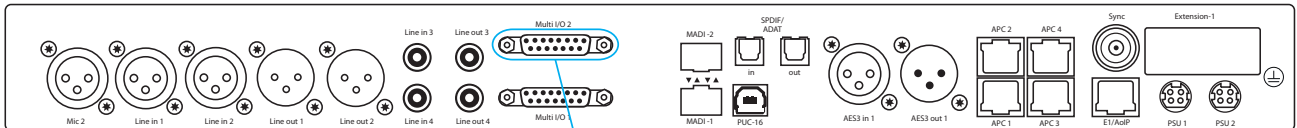

### Notes:

GPI and GPO sections are isolated from each other and from the module's internal circuits.

GPI section uses common wire GPI\_COM for GPI1 and GPI2  
Polarity of DC between GPIs and GPI\_COM is not relevant

GPI: ON voltage 5 V ... 24 V (DC) without external resistor, internal current limiter to 4 mA current for ON, OFF voltage: 0 V ... +15V