


litt

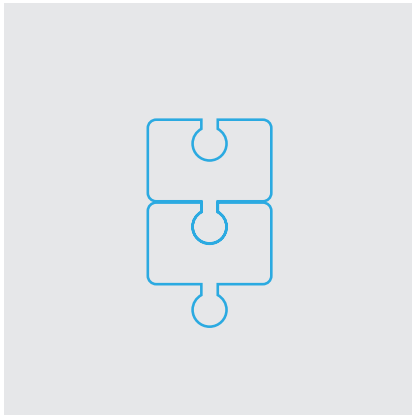

Connection Data

Power Supply Voltage	9V...24V
Power Rqmts	Base Controller: 0.5 W Color Segment: max 2.5W

Cable Data

Braid	mm2 0.2...0.5 AWG 26...20
Solid Wire	mm2 0.14...0.5 ø 0.45...0.8 AWG 26...20

Base Controller Connections

Label	Description	Signal
Chassis Ground	Housing Potential, Connection to protective Earth recommended	PE
+9-24V	Minus Connection of Supply Voltage, stable Power Supply Unit Plus Connection of Supply Voltage, stable Power Supply Unit	0V +9V...24 V
Red	Control Input for red Color Segment, operable practically without loading	+3...24 V
Yellow	Control Input for yellow Color Segment, operable practically without loading	+3...24 V
Green	Control Input for green Color Segment, operable practically without loading	+3...24 V
Blue	Control Input for blue Color Segment, operable practically without loading	+3...24 V
White	Control Input for white Color Segment, operable practically without loading	+3...24 V